
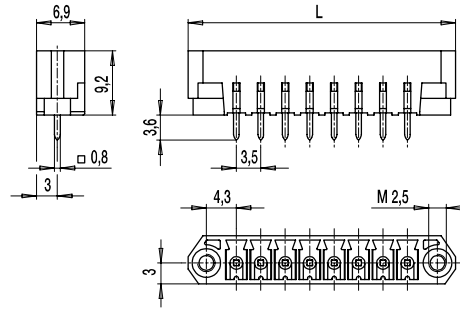


# 110-M-225

Pin strip  
 Plug-in direction vertical to PCB, with connecting flanges



## GENERAL INFORMATION

Pitch	3,5 mm
No. of poles	2 - 22
Usable with	all plug connectors of series 110 with connecting flanges

## TECHNICAL DATA

Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	160 V	160 V	320 V
Rated Impulse Voltage	2,5 kV	2,5 kV	2,5 kV
Rated Insulation Voltage	130 V acc. to EN 60998-1		
Rated Current	8 A		
Hole in PCB	ø 1,3 mm		

## APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	8	300	B, D		
	8	300	B		

## MATERIAL

Moulding	PA, grey, V-0
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Solder pin	0,8 x 0,8 mm; tin plated brass

## OPTIONS / ACCESSORIES

- Consecutive numbering
- Special marking according to drawing
- Self-adhesive marking strip BST-3,50
- Pitch of 7 mm for larger clearance and creepage distances
- Coding elements 120-K

## CONFIGURATIONS

Poles	Part number	Article number	Length (L)	Packaging	PU
2	110-M-225/02	20.841.052	17,30 mm	Box	100
3	110-M-225/03	20.841.053	20,80 mm	Box	100
4	110-M-225/04	20.841.054	24,30 mm	Box	100
5	110-M-225/05	20.841.055	27,80 mm	Box	50
6	110-M-225/06	20.841.056	31,30 mm	Box	50

further number of poles on request

