


## 308-PA/..-201

Distribution block

Tab connections 6 x 6,3 &amp; Screw connection; vertical

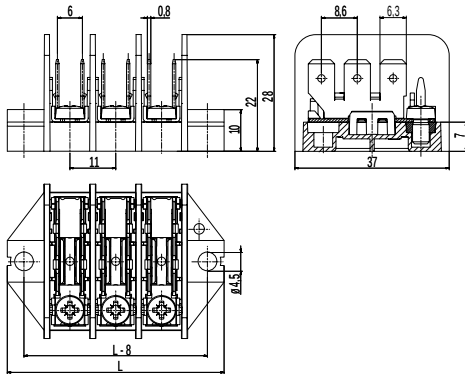

### Part Numbers

| No. of poles | 308-PA/..-201 | Length | PU  |
|--------------|---------------|--------|-----|
| 1            | 11.885.201    | 30     | 250 |
| 2            | 12.885.201    | 41     | 200 |
| 3            | 13.885.201    | 52     | 200 |
| 4            | 14.885.201    | 63     | 100 |
| 5            | 15.885.201    | 74     | 100 |
| 6            | 16.885.201    | 85     | 100 |
| 7            | 17.885.201    | 96     | 100 |
| 8            | 18.885.201    | 107    | 50  |
| 10           | 20.885.201    | 129    | 50  |
| 12           | 22.885.201    | 151    | 50  |

further number of poles on request

### General Information

|              |        |
|--------------|--------|
| Pitch        | 11 mm  |
| No. of poles | 1 - 16 |

### Technical Data

|                          |                                                                                                                                                                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Clamping Range           | <i>solid / flexible / AWG</i><br>0,5 - 2,5 mm <sup>2</sup> / 0,5 - 2,5 mm <sup>2</sup> / 20 - 14 AWG [1][2]                                                                                                                                                                                             |
| Rated Cross Section      | 1,5 mm <sup>2</sup> [3]                                                                                                                                                                                                                                                                                 |
| Wire Stripping Length    | 7 mm ± 0,5 mm                                                                                                                                                                                                                                                                                           |
| Rated Insulation Voltage | 450 V acc. to EN 60998-1                                                                                                                                                                                                                                                                                |
| Rated Current            | acc. to DIN EN 61210:<br>12 A with receptable 6,3; wire 1,5 mm <sup>2</sup><br>15 A with receptable 6,3; wire 2,5 mm <sup>2</sup><br>18 A with receptable 6,3; wire 4 mm <sup>2</sup><br>20 A with receptable 6,3; wire 6 mm <sup>2</sup><br><br>17,5 A with screw connection; wire 1,5 mm <sup>2</sup> |
| Torque                   | 1,7 Nm                                                                                                                                                                                                                                                                                                  |
| Other specifications     | Screw terminals are generally suitable for wires with identical wire type / cross-section.                                                                                                                                                                                                              |

### Material

|                            |                                        |
|----------------------------|----------------------------------------|
| Moulding                   | PA, natural, V-2                       |
| Comparative Tracking Index | CTI 250                                |
| Insulating Group           | IIIa                                   |
| Temperature Range          | RTI Str 90°C                           |
| Tab                        | Zinc plated steel                      |
| Screw                      | M4; Zinc plated steel, blue passivated |
| Square washer              | M4; Zinc plated steel                  |

### Approvals

|                                                                                     | Current [A] | Voltage [V] | Group              | AWG         | [Nm] |
|-------------------------------------------------------------------------------------|-------------|-------------|--------------------|-------------|------|
|  | 15          | 300         | B                  | 16 - 14 [4] | 1,7  |
|                                                                                     | 10          | 300         | D                  | 16 - 14 [4] | 1,7  |
|                                                                                     | Current [A] | Voltage [V] | [mm <sup>2</sup> ] |             |      |
|  | 17,5        | 450         | 1,5                |             |      |

### Options / Accessories

- Consecutive numbering
- Special marking according to drawing
- Fixed marking in the tool on request
- Jumper VB-308

[1] Per pole two wires of identical cross-section can be connected. This is valid up to 1,5 mm<sup>2</sup> / 16 AWG.

[2] Ferrules are required when using flexible or multi-stranded wires

[3] Screw connection

[4] AWG specifications refer to screw connections