


983-UD

PCB connector

Screw connection, 2 solder pins per pole, with surrounding rib

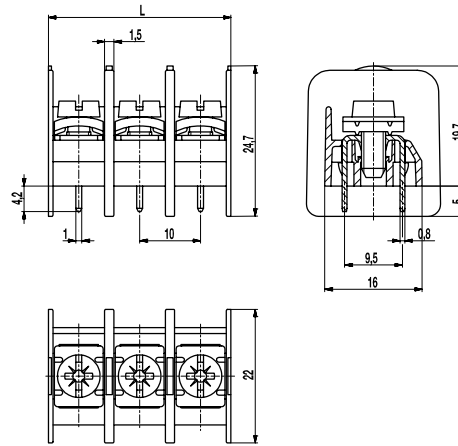

GENERAL INFORMATION

Pitch	10 mm
No. of poles	2 - 7
Additional Information	with plus/minus screw, cross recess: Pozidriv

TECHNICAL DATA

Clamping Range	solid / stranded / AWG 0,75 - 2,5 mm ² / 0,75 - 2,5 mm ² / 18 - 12 AWG		
Rated Cross Section	2,5 mm ²		
Wire Stripping Length	8,5 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	800 V	1000 V	1000 V
Rated Impulse Voltage	8 kV	8 kV	6 kV
Rated Insulation Voltage	750 V acc. to EN 60998-1		
Rated Current	24 A		
Hole in PCB	ø 1,6 mm		
Torque	1,2 Nm		
Other specifications	Per pole two wires of identical cross-section can be connected.		

APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	20	600	B, C	20 - 12	1,13
	20	600	B, C	20 - 12	1,13

CONFIGURATIONS

Poles	Part number	Article number	Length (L)	Packaging	PU
2	983-UD/02	20.873.862	20,00 mm	Box	200
3	983-UD/03	20.873.863	30,00 mm	Box	200
4	983-UD/04	20.873.864	40,00 mm	Box	100
5	983-UD/05	20.873.865	50,00 mm	Box	100
6	983-UD/06	20.873.866	60,00 mm	Box	100

MATERIAL

Moulding	PA HT, black, V-0
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 120°C; temporary max. 260°C (15-30 sec)
Pressure clamp	Tin plated brass
Screw	M4; zinc plated steel, blue passivated
Solder pin	0,8 x 1,0 mm; tin plated brass

OPTIONS / ACCESSORIES

- 10 mm pin length

