


121-ME-221

Pin strip

Plug-in direction vertical to PCB



GENERAL INFORMATION


Pitch	5,08 mm
No. of poles	2 - 24
Usable with	121-FEP-311

TECHNICAL DATA

Rated Impulse Voltage	4 kV
Rated Current	16 A
Hole in PCB	ø 1,5 mm

APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	16	300	B, D		

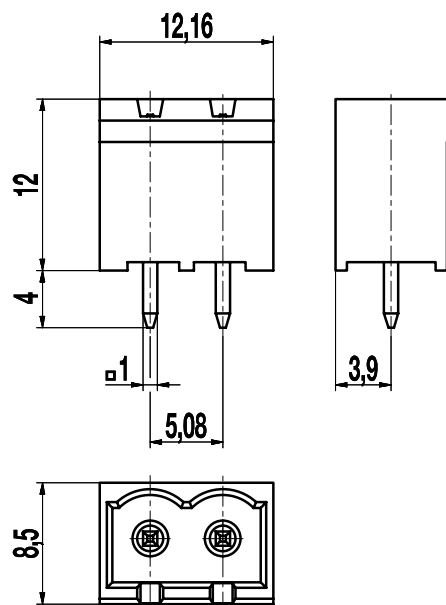

MATERIAL

Moulding	PA V0, black
Temperature Range	-40°C up to 130°C
Solder pin	1,0 x 1,0 mm; tin-plated copper alloy

CONFIGURATIONS

Poles	Item	Article number	Length (L)	Packaging	PU
2	121-ME-221/02	20.806.982	12,16 mm	Box	250
3	121-ME-221/03	20.806.983	17,24 mm	Box	250
4	121-ME-221/04	20.806.984	22,32 mm	Box	250
5	121-ME-221/05	20.806.985	27,4 mm	Box	
6	121-ME-221/06	20.806.986	32,48 mm	Box	
7	121-ME-221/07	20.806.987	37,56 mm	Box	
8	121-ME-221/08	20.806.988	42,64 mm	Box	
9	121-ME-221/09	20.806.989	47,72 mm	Box	
10	121-ME-221/10	20.806.990	52,8 mm	Box	50
11	121-ME-221/11	20.806.991	57,88 mm	Box	
12	121-ME-221/12	20.806.992	62,96 mm	Box	

further number of poles on request

