


302-NSTS(-DS)

Plug-in terminal strip

Screw connection & pin, low profile version

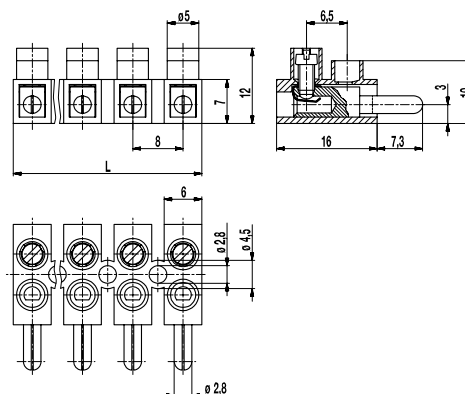

GENERAL INFORMATION

Pitch	8 mm
No. of poles	2 - 12
Usable with	302-NSTB(-DS)
Areas of application	This terminal strip is well suited for applications that require to easily open and close not energised circuits.

TECHNICAL DATA

Clamping Range	<i>solid / stranded / AWG</i>		
without wire protector	0,5 - 4 mm ² / 0,5 - 2,5 mm ² / 20 - 12 AWG		
with wire protector	0,34 - 2,5 mm ² / 0,34 - 1,5 mm ² / 22 - 14 AWG		
Rated Cross Section	1,5 mm ²		
Wire Stripping Length	6 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	160 V	160 V	320 V
Rated Impulse Voltage	2,5 kV	2,5 kV	2,5 kV
Rated Insulation Voltage	130 V acc. to EN 60998-1		
Rated Current	6 A		
Torque	0,4 Nm		
Other specifications	Rated values apply to use in combination with 302-NSTB(-DS).		

APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	10	300	B,D	22 - 14	0,4 [2]
	10	300	B,D,E	26 - 12	0,4 [1][2]

MATERIAL

Moulding	PA, natural, V-2
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Terminal body	Nickel plated brass
Screw	M2,6; zinc plated steel, blue passivated
Wire protector	Tin plated tin bronze
Plug	Nickel plated brass

OPTIONS / ACCESSORIES

- Marking options on the screw guides
- Jumper 302-J
- Moulding made of special polyamide for e.g. household appliances
- Screws made out of brass

[1] for 302-NSTS-DS: 26 - 14 AWG

[2] For mounting on a suitable insulated surface, spacer or similar means

CONFIGURATIONS

Version	Poles	Item	Article number	Item	Article number	Length (L)	PU
Standard	2	302-NSTS/02	12.820.046	302-NSTS-DS/02	72.820.046	15,00 mm	250
Standard	3	302-NSTS/03	13.820.046	302-NSTS-DS/03	73.820.046	23,00 mm	250
Standard	4	302-NSTS/04	14.820.046	302-NSTS-DS/04	74.820.046	31,00 mm	200
Standard	5	302-NSTS/05	15.820.046	302-NSTS-DS/05	75.820.046	39,00 mm	100
Standard	6	302-NSTS/06	16.820.046	302-NSTS-DS/06	76.820.046	47,00 mm	80
Standard	7	302-NSTS/07	17.820.046	302-NSTS-DS/07	77.820.046	55,00 mm	80
Standard	8	302-NSTS/08	18.820.046	302-NSTS-DS/08	78.820.046	63,00 mm	80
Standard	9	302-NSTS/09	19.820.046	302-NSTS-DS/09	79.820.046	71,00 mm	60
Standard	10	302-NSTS/10	20.820.046	302-NSTS-DS/10	80.820.046	79,00 mm	50
Standard	11	302-NSTS/11	21.820.046	302-NSTS-DS/11	81.820.046	87,00 mm	50
Standard	12	302-NSTS/12	22.820.046	302-NSTS-DS/12	82.820.046	94,00 mm	40

