
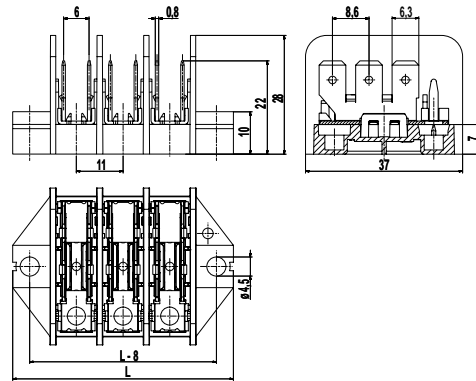


308-PA/..-202

Distribution block
 Tab connections 6 x 6.3; vertical

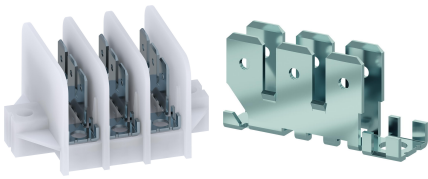

GENERAL INFORMATION

Pitch	11 mm
No. of poles	1 - 16

TECHNICAL DATA

Rated Insulation Voltage	450 V acc. to EN 60998-1
Rated Current	acc. to DIN EN 61210: 12 A with receptable 6,3; wire 1,5 mm ² 15 A with receptable 6,3; wire 2,5 mm ² 18 A with receptable 6,3; wire 4 mm ² 20 A with receptable 6,3; wire 6 mm ²

APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	20	300	B		
	10	300	D		
	Current [A]	Voltage [V]	mm ²		
	17,5	450	1,5		

MATERIAL

Moulding	PA, natural, V-2
Comparative Tracking Index	CTI 250
Insulating Group	IIIa
Temperature Range	RTI Str 90°C
Tab	Zinc plated steel

OPTIONS / ACCESSORIES

- Consecutive numbering
- Special marking according to drawing
- Fixed marking in the tool on request

CONFIGURATIONS

Poles	Item	Article number	Length (L)	PU
1	308-PA/01-202	11.885.202	30 mm	250
2	308-PA/02-202	12.885.202	41 mm	200
3	308-PA/03-202	13.885.202	52 mm	200
4	308-PA/04-202	14.885.202	63 mm	100
5	308-PA/05-202	15.885.202	74 mm	100
6	308-PA/06-202	16.885.202	85 mm	100
7	308-PA/07-202	17.885.202	96 mm	100
8	308-PA/08-202	18.885.202	107 mm	50
10	308-PA/10-202	20.885.202	129 mm	50
12	308-PA/12-202	22.885.202	151 mm	50

further number of poles on request

