


324-STFB(-DS)

Plug-in terminal strip
Screw connection & socket

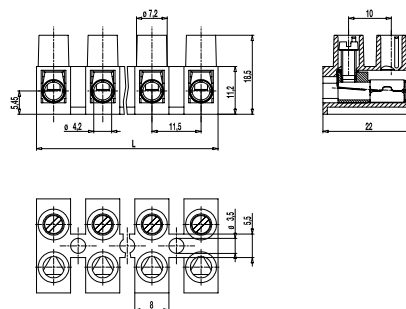

GENERAL INFORMATION

Pitch	11,5 mm
No. of poles	2 - 12
Usable with	324-STFS(-DS)
Areas of application	Applications that require to easily open and close not energised circuits.

TECHNICAL DATA

Clamping Range	<i>solid / stranded / AWG</i>		
without wire protector	1 - 10 mm ² / 1 - 6 mm ² / 16 - 10 AWG		
with wire protector	0,75 - 6 mm ² / 0,75 - 4 mm ² / 18 - 12 AWG		
Rated Cross Section	4 mm ²		
Wire Stripping Length	7 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	250 V (500 V)	320 V (630 V)	630V (1000V)
Rated Impulse Voltage	4 kV (6 kV)	4 kV (6 kV)	4 kV (6 kV)
Rated Insulation Voltage	250 V acc. to EN 60998-1		
Rated Current	25 A		
Torque	0,8 Nm		
Other specifications	Rated values apply to use in combination with 324-STFS(-DS). Values in parentheses apply to use without insulated substrates.		

APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	25	150	B,D	18 - 10	
	20	300	B	26 - 10	0,79
	10	300	D,E	26 - 10	0,79

CONFIGURATIONS

Version	Poles	Item	Article number	Item	Article number	Length (L)	PU
Standard	2	324-STFB/02	32.823.004	324-STFB-DS/02	32.823.017	21,00 mm	1000
Standard	3	324-STFB/03	33.823.004	324-STFB-DS/03	33.823.017	32,00 mm	500
Standard	4	324-STFB/04	34.823.004	324-STFB-DS/04	34.823.017	44,00 mm	500
Standard	5	324-STFB/05	35.823.004	324-STFB-DS/05	35.823.017	55,00 mm	250
Standard	6	324-STFB/06	36.823.004	324-STFB-DS/06	36.823.017	67,00 mm	100
Standard	7	324-STFB/07	37.823.004	324-STFB-DS/07	37.823.017	78,00 mm	75
Standard	8	324-STFB/08	38.823.004	324-STFB-DS/08	38.823.017	90,00 mm	60
Standard	9	324-STFB/09	39.823.004	324-STFB-DS/09	39.823.017	101,00 mm	50
Standard	10	324-STFB/10	40.823.004	324-STFB-DS/10	40.823.017	113,00 mm	50
Standard	11	324-STFB/11	41.823.004	324-STFB-DS/11	41.823.017	124,00 mm	50
Standard	12	324-STFB/12	42.823.004	324-STFB-DS/12	42.823.017	135,00 mm	50

