


406

Tab connector
Lead distributor




GENERAL INFORMATION

No. of poles 1

TECHNICAL DATA

Overvoltage Category	III
Pollution Severity Level	3
Rated Voltage	630 V
Rated Impulse Voltage	6 kV
Rated Insulation Voltage	750 V acc. to EN 60998-1
Rated Current	20 A: with receptacle 6,3; wire 6,0 mm ² (10 AWG)
Other specifications	Rated values apply to use without insulated underlay

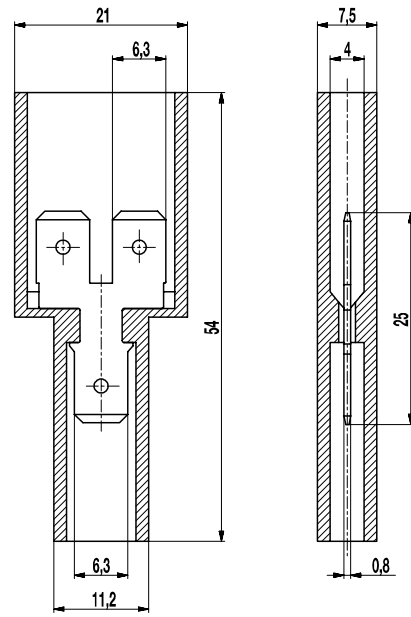

MATERIAL

Moulding	Soft PVC, transparent, V-2
Comparative Tracking Index	CTI 400
Insulating Group	II
Temperature Range	-10°C up to 70°C
Tab	Nickel plated brass

OPTIONS / ACCESSORIES

- Special marking according to drawing

CONFIGURATIONS

Poles	Item	Article number	Length (L)	PU
1	406/01	10.836.008	54 mm	250

